

Product Specification

Electrical

- › Input Voltage: 100–240V 47/63Hz
- › Output Voltage: 200–240V
- › Rated Power: 37W (during operation), 1.8W (standby)
- › Operating Temperature Range: 0°C to +35°C
- › Enclosure Rating: Transformer IP67, Kelda hub IPX4
- › Requires 3Amp switched fused spur in dry zone
- › Fused spur to be connected back to 32A 30mA RCBO

Logistics

- › Net Weight: 9.1kg
- › Packed Weight: 11kg
- › Packed Dimensions: (H) 1105 x (W) 225 x (D) 282

Construction

- › Panel Body: SAE 304 Stainless Steel
- › Finishes: Brushed Stainless Steel or White Powder Coat
- › Shower Head: Chrome Plated ABS
- › Shower Faceplate: ABS
- › Nozzles: TPE

Operation

- › Digital Push Button Timed Flow
- › 5 timer settings available: 10s, 15s, 30s, 45s, 60s
- › Adjust to suit installation preference
- › Default setting is 30 seconds
- › See installation guide for details
- › Minimum advised working pressure 1 bar
- › Maximum advised working pressure 5 bar
- › Thermostatic mixing valve included – TMV2

Maintenance Schedule*

- › External Surfaces: Daily/Weekly
- › Showerhead: Quarterly
- › Internal Descale: Bi-Annually

*Frequency should be adjusted inline with local water hardness and usage levels

Warranty

- › 2 Years (excluding solenoid)




Approved Materials



Where valve included



Product Dimensions

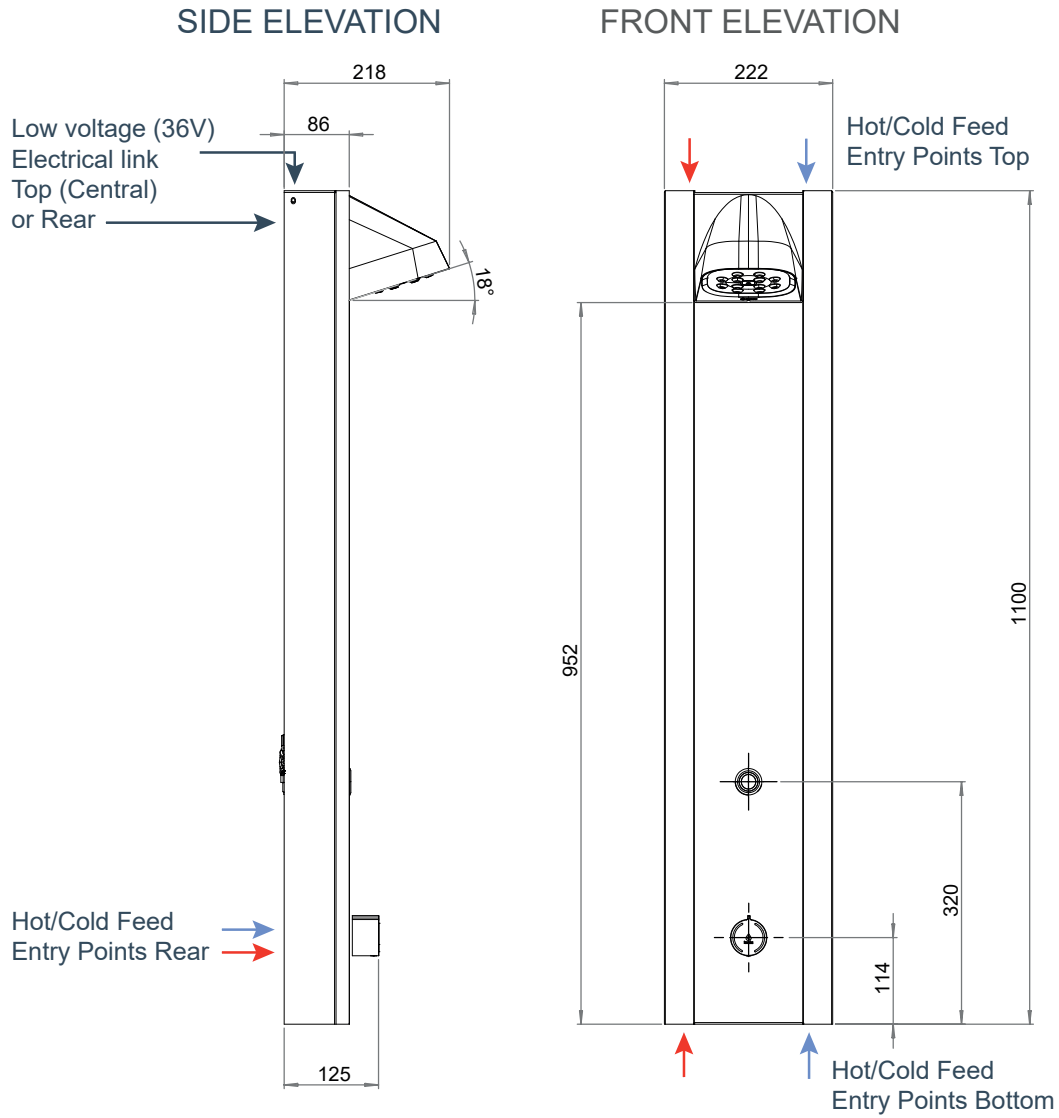

Product Dimensions (mm)		Installation* (mm)		Flow Rates (SKU No.)	
> Length:	1100	Height to Shower Head:		> 4 lpm	93011004
> Width:	222	> Min:	1950	> 5 lpm	93011005
> Depth of Panel:	86	> Max:	2100	> 6 lpm	93022006
> Depth to Head:	218				

*Installation should be completed to suit the user's requirements